

HORIZONTAL SLIDING WINDOW

SG SERIES



A wide selection of high performance glass types can be specified within the SG Series. These include body tints, super tints & a range of laminated glass up to 6.76mm in thickness



All glass is installed into vinyl sided rebates, ensuring vibration free glazing. A co-extruded santroprene inner seal resists shrinkage whilst assisting with the products weatherproofing



The push-lock also latches for vent-locking




Larger, more complex window styles can be fitted with transoms
Reveals are pre-primed, providing a smooth surface for painting

HORIZONTAL SLIDING WINDOW



SG SERIES

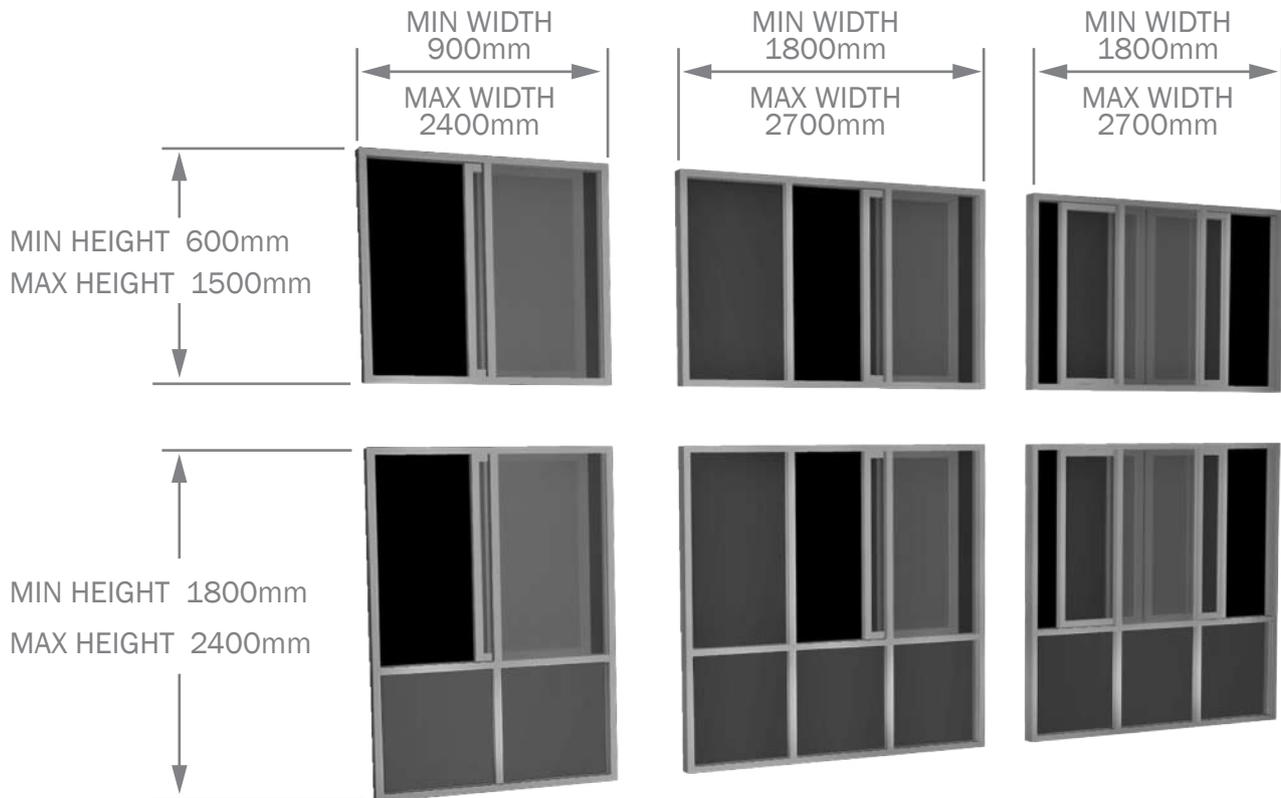

NOTE: ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES & CONFIGURATIONS OUTSIDE OF THESE, PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

Sizing

Window style & opening detail should be considered as viewed externally

Sizes indicated are the overall window size. Reveal is inline with outer frame dimension

For Stud openings add 20mm to both height & width

Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Maximum glass thickness is 6.76mm (laminated)

Certification

Certified performance data including WERS ratings are available for this product on request

Specify

Frame colour, configuration, height, width & overall depth

Optional: frame equaliser, frame infill, flyscreen, glass type, sill flap