


SLIDING DOOR (Rw45)

RYLOCK ACOUSTIC SERIES

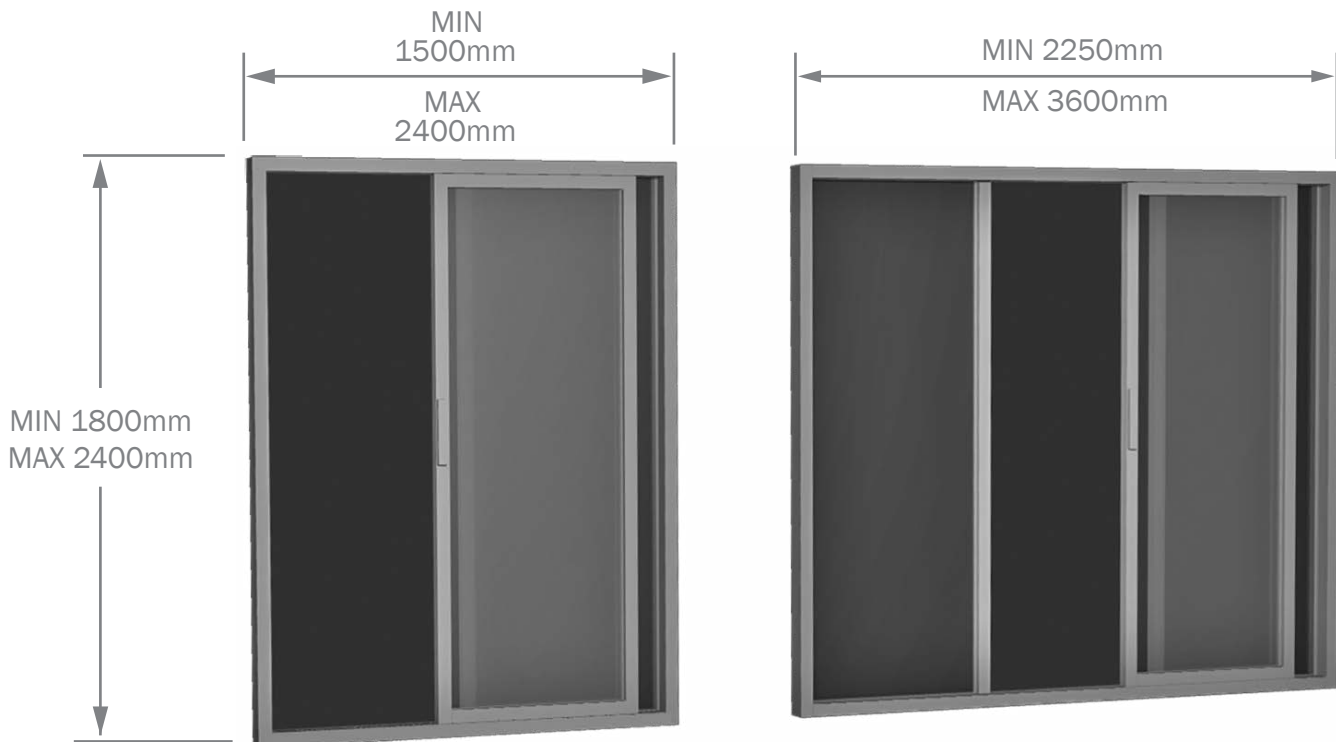

NOTE: ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE, PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

Sizing

Door style & opening detail should be considered as viewed externally

Product depth is greater-than-or-equal-to 225mm, due to acoustic spacing between panes

Sizes indicated are the overall window size. Reveal is inline with outer frame dimension

For Stud openings add 20mm to both height & width

Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

External glazing is 6mm toughened

Internal glazing is 6.38mm

Specify

Frame colour, configuration, height, width & overall depth

Optional: Handle type & colour, patio bolt, frame equaliser, external frame infill, sill flap, external glass type, flyscreen

Performance

Performance Index Number Rw: 45

Certification

Certified performance data (from CSIRO) for Rw, STC & CTR+Rw is available for this product on request

V15.1